


注:铁带为白锌

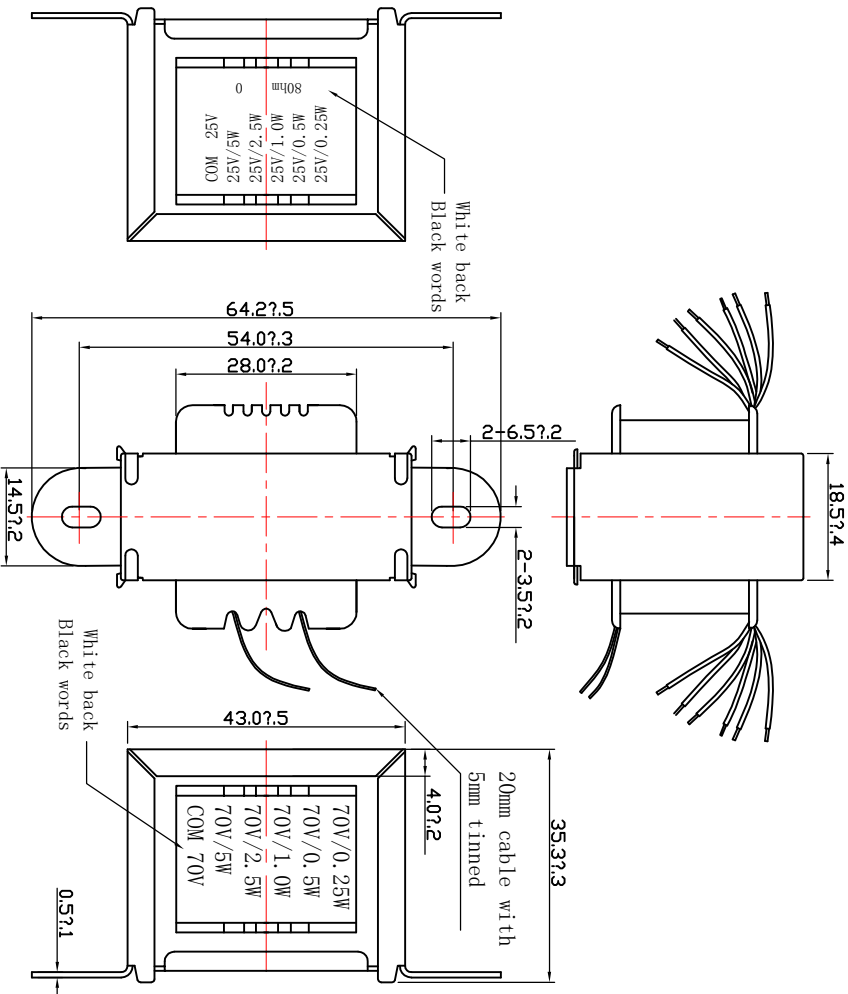

TEST CONDITION

Wire	Wire diameter	Winding	Low imp	Impedance	Voltage (with Ohz NLV)	
Copper wire	Copper wire 0.5#	80		156Ω ±10%		5.8V ±15%
Copper wire	Copper wire 0.15#	332		312Ω ±10%		4.1V ±15%
Black-Brown	Copper wire 0.15#	475		625Ω ±10%	25V	2.90V ±15%
Black-Red	Copper wire 0.15#	679		1250Ω ±10%		2.03V ±15%
Black-Orange	Copper wire 0.1#	967		2450Ω ±10%		1.43V ±15%
Black-Yellow	Copper wire 0.1#	1375		1250Ω ±10%		5.8V ±15%
Black-Purple	Copper wire 0.1#	980	8Ω	2450Ω ±10%		4.11V ±15%
Black-Grey	Copper wire 0.1#	1390		4900Ω ±10%	70V	2.90V ±15%
Black-Green	Copper wire 0.1#	1969		9800Ω ±10%		2.03V ±15%
Black-Blue	Copper wire 0.1#	2771		19600Ω ±10%		1.43V ±15%
Black-White	Copper wire 0.1#	4024				
Black-Pink	Copper wire 0.1#					

1. 绝缘电阻测试:

在初级与次级, 初级与铁芯间施加250VDC/1分钟(生产线为2秒)测得其绝缘电阻为100MΩ最小.

2. 耐压测试:

在初级与次级, 初级与铁芯间施加1.0KV1分钟或1.2KV2秒无绝缘体被击穿(漏电流为3MA最大).

⑤ ×			角法 3rd	一般公差		全位编号:70-415319		图名: 变压器	
④ ×			单位 mm	0-4mm	± 0.10mm	厂商:		版本版次:A/0 页次:1/1	
③ ×			比例: 1 / 1	>4-16mm	± 0.20mm	厂商编号:			
② ×				>16-63mm	± 0.30mm	承认	照查	担当	作成
① ×				>63-250mm	± 0.50mm				
符号	变更、追加内容	相当		日期	>250-1000mm	± 0.80mm			
			机种名:TH-G86TCG	>1000mm	± 1.0mm	材质:图中			
			重量: g ± 10%	颜色:图中					